


# Mikroschalter Tmax +240°C



# Mikroschalter Tmax +240°C

## MV25-M3-CRT240

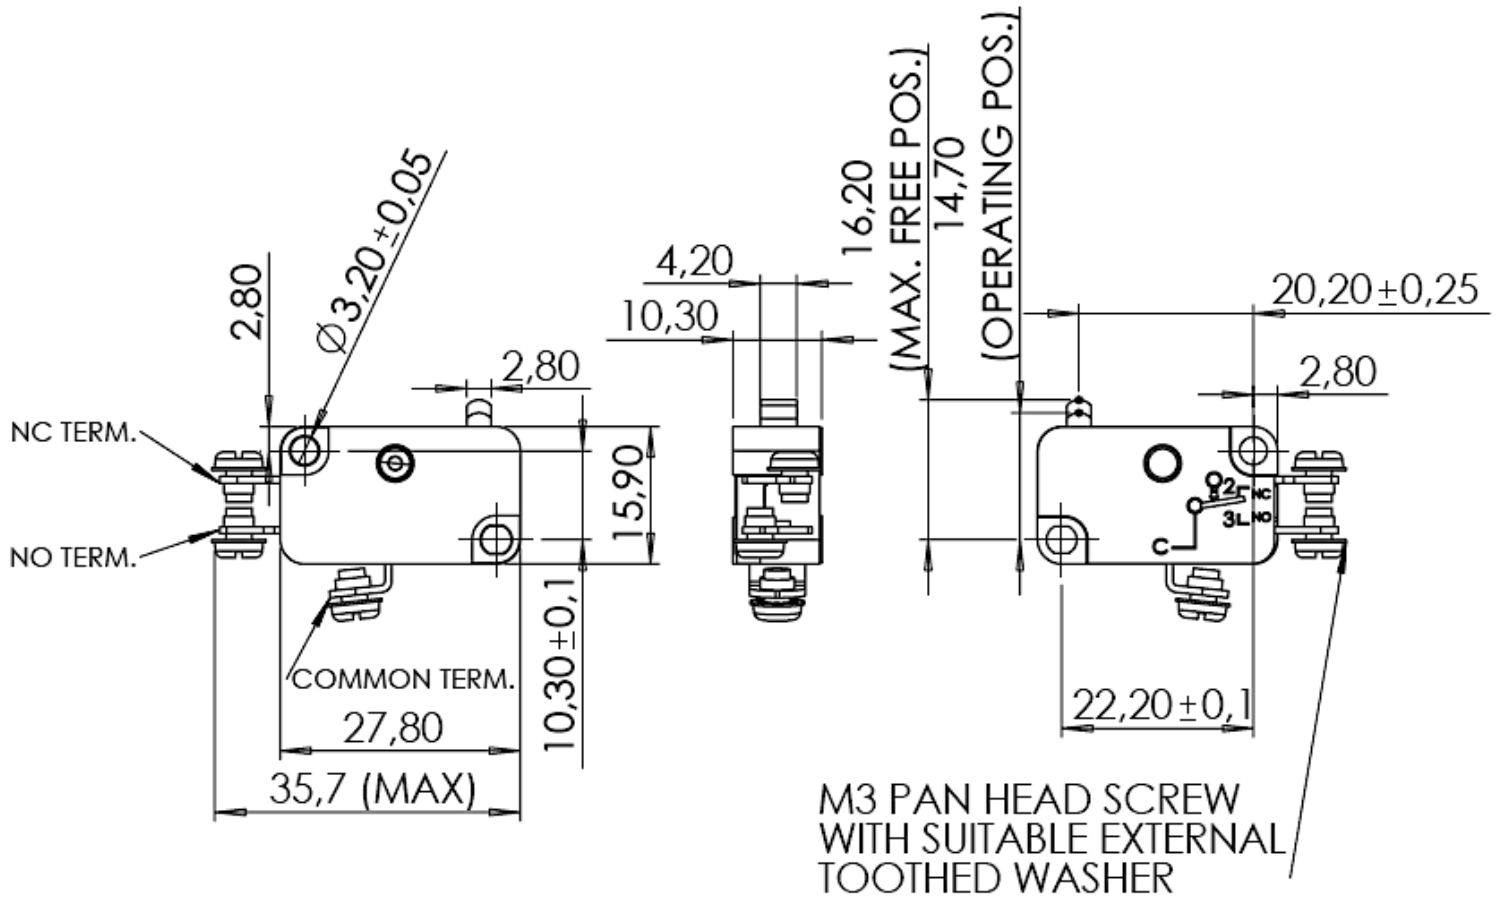

### SPECIFICATIONS

#### ELECTRICAL

CURRENT RATING	: 16A at 250V AC
VOLTAGE PROOF	: 1500 VAC between each terminal and around : 1000 VAC between open contacts.

INSULATION RESISTANCE	: 100 MOhms Min. at 500VDC
CONTACT RESISTANCE	: 15 milliOhms max. (Initial)

#### MECHANICAL

OPERATING FORCE	: 400gm max.
RELEASE FORCE	: 80gm min.
PRETRAVEL	: 1.2mm max.
MOVEMENT DIFFERENTIAL	: 0.4mm max.
OVERTRAVEL	: 1.0mm min.

#### LIFE EXPECTANCY

MECHANICAL	: 1,000,000 Operations
ELECTRICAL	: 100,000 Operations at rated load

#### ENVIRONMENTAL DATA

OPERATING TEMPERATURE	: Upto 240°C
-----------------------	--------------